


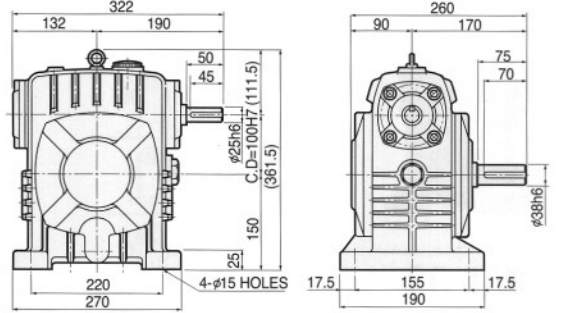



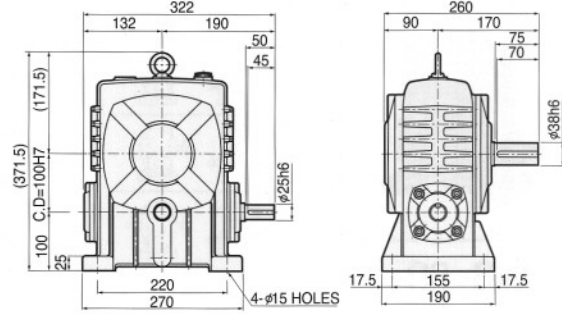



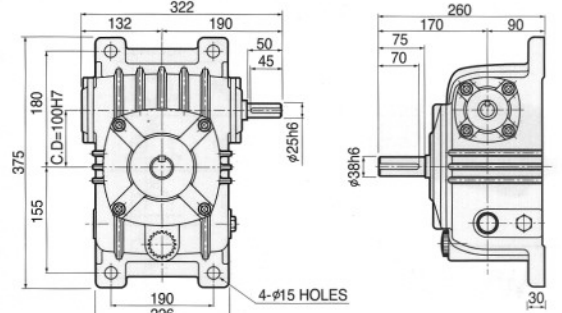


Single Worm Reducer

1단 웜 감속기

MODEL	축배치 및 회전방향	도면	
 <p>WU-100 W ≈ 40 kg</p>			
 <p>WB-100 W ≈ 40 kg</p>			
 <p>WV-100 W ≈ 45 kg</p>			

전동능력표

수치는 1일 8~10시간 연속 운전이고 균일 하중의 수치입니다.

RATIO	INPUT rpm 1800				INPUT rpm 1500				INPUT rpm 1200			
	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf
1/10	8.73	7.19	28.5	167	7.93	6.47	30.8	177	6.93	5.60	33.4	190
1/15	6.33	5.03	29.9	204	5.67	4.43	31.7	217	5.09	4.00	35.3	230
1/20	5.03	3.93	31.2	239	4.57	3.55	33.8	252	4.03	3.09	36.9	269
1/25	3.95	3.03	30.1	272	3.53	2.67	31.9	289	3.15	2.35	35.0	302
1/30	4.20	3.00	35.8	265	3.81	2.67	38.2	281	3.35	2.31	41.1	302
1/40	3.17	2.20	35.1	316	2.87	1.96	37.4	336	2.55	1.71	40.9	359
1/50	2.39	1.59	31.8	364	2.17	1.43	34.0	386	1.93	1.24	37.0	415
1/60	1.96	1.27	30.4	400	1.79	1.15	32.7	424	1.59	0.97	34.9	458

RATIO	INPUT rpm 900				INPUT rpm 600				INPUT rpm 300			
	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf
1/10	5.87	4.69	37.3	207	4.68	3.65	43.3	235	2.79	2.09	50.0	297
1/15	4.33	3.29	39.3	251	3.39	2.48	44.5	289	1.99	1.39	50.0	365
1/20	3.40	2.53	40.3	297	2.67	1.93	46.2	240	1.52	1.04	50.0	435
1/25	2.67	1.92	38.2	341	2.09	1.47	43.9	390	1.27	0.83	50.0	509
1/30	2.89	1.92	46.0	330	2.23	1.39	50.0	382	1.22	0.69	50.0	538
1/40	2.03	1.28	46.0	397	1.17	1.04	50.0	458	0.92	0.52	50.0	623
1/50	1.67	1.05	40.2	458	1.29	0.75	44.7	528	0.79	0.41	50.0	650
1/60	1.37	0.79	38.1	504	1.05	0.59	42.0	583	0.68	0.35	49.8	650