

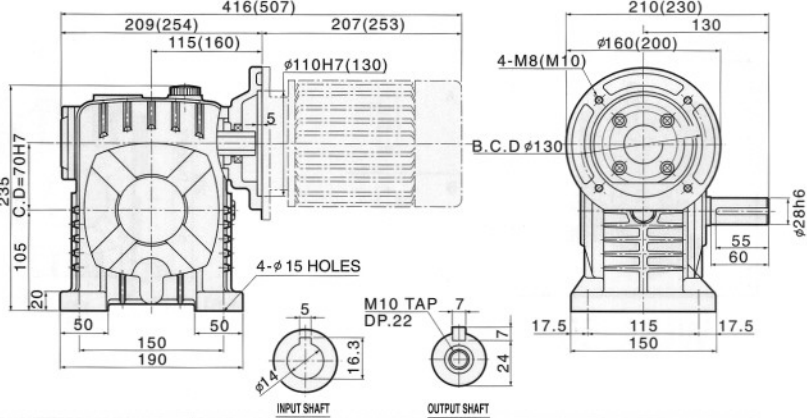


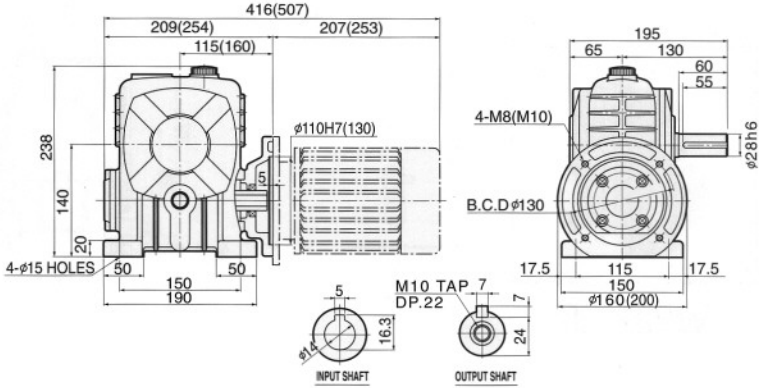

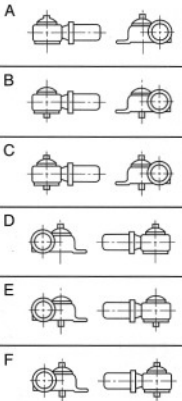
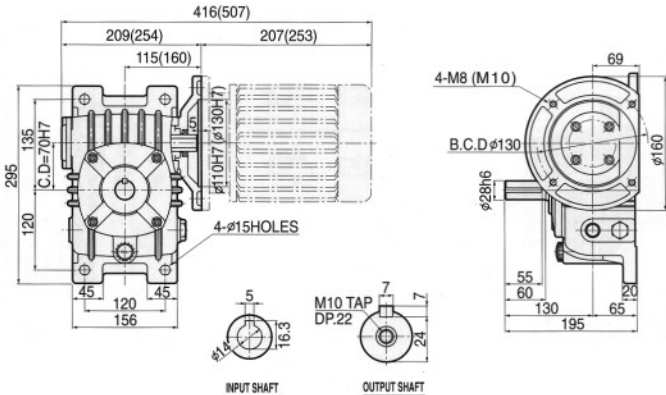


Single Worm Geared Motor

1단 웜 기어드 모터

MODEL	추배치 및 회전방향	도면
 <p>WUM-70</p>		
 <p>WBM-70</p>		
 <p>WVM-70</p>		

전동능력표

수치는 1일 8~10시간 연속 운전이고 균일 하중의 수치입니다.

RATIO	1800				1500			
	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf
1/10	1.00	0.80	3.22	128	1.00	0.80	3.84	136
1/15	1.00	0.76	4.63	153	1.00	0.76	5.51	161
1/20	1.00	0.76	6.06	178	1.00	0.75	7.17	188
1/30	1.00	0.68	8.21	198	1.00	0.67	9.71	208
1/40	1.00	0.65	10.58	233	1.00	0.64	12.40	247
1/50	0.50	0.34	6.96	266	0.5	0.33	8.10	282
1/60	0.50	0.33	8.05	289	0.5	0.30	9.11	300