


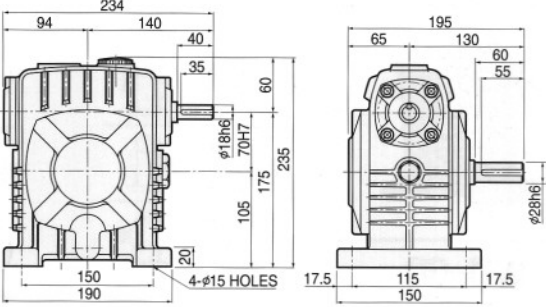



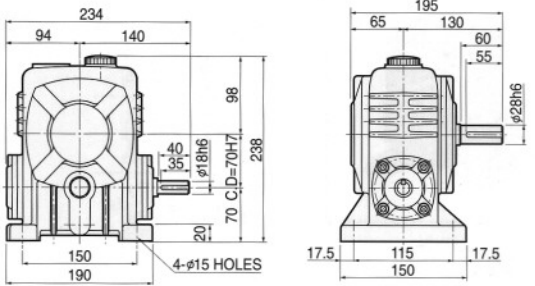



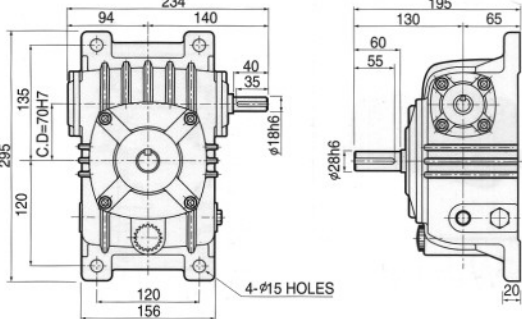


Single Worm Reducer

1단 웜 감속기

MODEL	축배치 및 회전방향	도면	
 <p>WU-70 W ≈ 15 kg</p>			
 <p>WB-70 W ≈ 15 kg</p>			
 <p>WV-70 W ≈ 15 kg</p>			

전동능력표

수치는 1일 8~10시간 연속 운전이고 균일 하중의 수치입니다.

RATIO	INPUT rpm 1800				INPUT rpm 1500				INPUT rpm 1200			
	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf
1/10	3.47	2.82	11.2	128	3.11	2.51	11.9	136	2.77	2.20	13.1	145
1/15	2.53	1.96	11.7	153	2.29	1.76	12.6	161	2.03	1.52	13.6	174
1/20	1.93	1.47	11.7	178	1.75	1.31	12.5	188	1.55	1.15	13.6	202
1/25	1.79	1.33	13.3	203	1.63	1.19	14.3	211	1.43	1.03	15.3	231
1/30	1.69	1.16	13.8	198	1.55	1.05	15.0	208	1.36	0.89	16.1	225
1/40	1.24	0.83	13.1	233	1.13	0.73	14.0	247	1.01	0.63	15.0	266
1/50	1.12	0.72	14.3	266	1.03	0.64	15.2	282	0.91	0.55	16.3	300
1/60	0.95	0.59	13.9	289	0.87	0.51	14.6	300	0.76	0.43	15.6	300

RATIO	INPUT rpm 900				INPUT rpm 600				INPUT rpm 300			
	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf	INPUT HP	OUTPUT HP	OUTPUT T kgf-m	OUTPUT O.H.L kgf
1/10	2.33	1.81	14.4	159	1.85	1.41	16.9	180	1.20	0.88	21.1	228
1/15	1.73	1.28	15.2	190	1.33	0.96	17.3	218	0.87	0.59	21.4	277
1/20	1.31	0.95	15.0	222	1.03	0.71	17.1	255	0.65	0.43	20.6	300
1/25	1.21	0.85	16.8	255	0.95	0.64	20.1	284	0.60	0.39	23.8	300
1/30	1.19	0.75	17.7	247	0.92	0.56	20.1	284	0.59	0.33	23.8	300
1/40	0.87	0.51	16.5	293	0.67	0.39	18.6	300	0.43	0.23	21.9	300
1/50	0.77	0.45	17.8	300	0.60	0.33	19.7	300	0.39	0.19	23.2	300
1/60	0.65	0.36	17.0	300	0.51	0.27	18.6	300	0.32	0.15	22.0	300